


The safe vapour control layer – thanks to Hygrobrid[®] technology

A major challenge



Wood constructions without rear ventilation of the insulating layer are critical in terms of building physics. Structures frequently have no rear ventilation because of cost - or for aesthetic reasons. Moisture from drying screed and plaster as well as enclosed construction moisture can quickly become a problem.

Variable vapour control layers have not been as successful as expected in reducing the risk of damage. SIGA set itself the target of producing a particularly safe vapour control layer.


Majrex®

See hygrothermal simulations [EN 15026: 2007; WTA 6-2:2014] for externally vapour proof wood constructions without rear ventilation.

IBK Engineering in Dresden (Germany) has developed the building physics software Delphin further to enable a standardised calculation of directional depending diffusion resistances.

Mathematical proof of Hygrobrid® technology is possible as of now.

The secret



SIGA took a look at nature and asked: Why is it that the cactus can survive extreme climatic conditions such as heat and drought?


The secret: "Moisture transport in one direction only".

After several years of research and development SIGA has succeeded in deciphering the secret of

This led to SIGA's development of Hygrobrid® technology – one-directional moisture transport.

It resulted in the creation of a particularly safe vapour control layer for every building – **SIGA-Majrex**[®] with Hygrobrid[®] technology.

the cactus.



New technology

IEM. VOI

Greater safety

> **SIGA-Majrex**[®] ensures better safety for wood constructions even when moisture levels are high - after screed has been laid, when walls are freshly plastered or when the structure is subjec-

ted to extreme moisture during use.

GA-MIGITON



Moisture development within the structure is minimised and moisture transport out of the structure is maximised thanks to Hygrobrid® technology.

It lets moisture in but not out again.

How can we use this ingenious principle for our new vapour control layer?

The calculation method



SIGA-Majrex[®] with Hygrobrid[®] technology




Conventional variable vapour control layers

The Technical University of Dresden performed material measurements in the lab and measurements of construction elements in flat roofs in critical climatic conditions.

The measurements prove that **SIGA-Majrex**[®] with Hygrobrid[®] technology significantly reduces moisture development in the structure compared with conventional variable vapour control layers!

> And the diffusion of any moisture that is in the structure to the outside is faster.



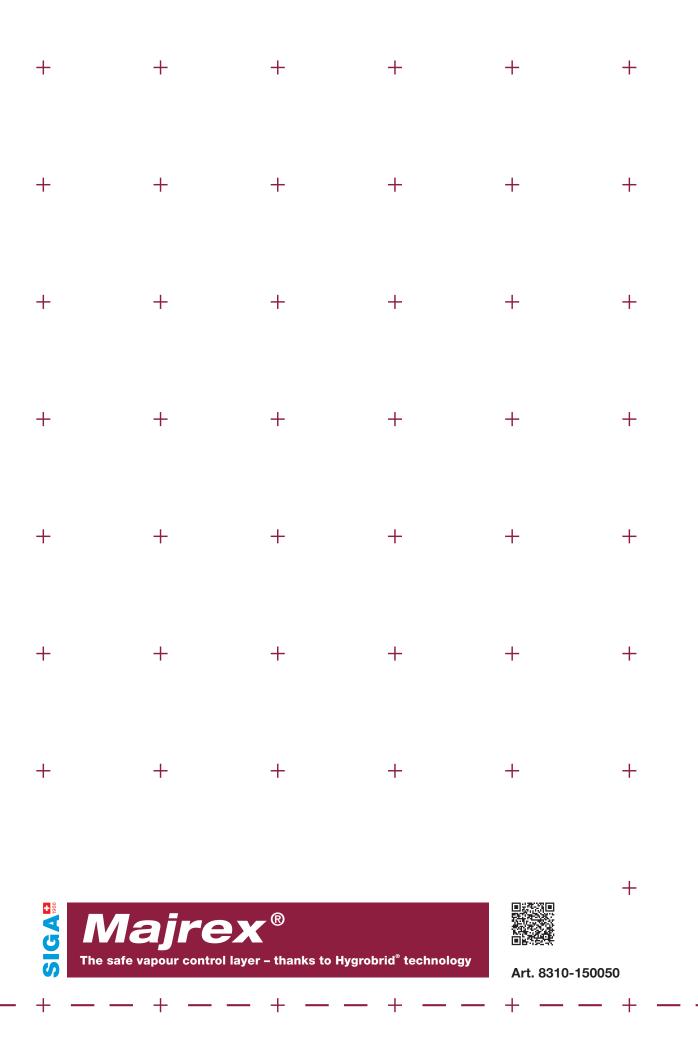

KM9431 / SKU-2083en